


SPINDELLEISTUNGS- DIAGRAMME. [Spindle power diagrams.]




Hauptspindeln [Main spindles]

		ACURA	FORTE 50/65/85	TILTENTA	FORTE 6/7/9/11
SK 40	CELOX 14.000 min ⁻¹ , 117 Nm, 22 kW	●	●	●	●
SK 40	CELOX 14.000 min ⁻¹ , 183 Nm, 29 kW	●	●	●	●
SK 40	CELOX 14.000 min ⁻¹ , 185 Nm, 37 kW	●	●	●	●
SK 40 / HSK A63	CELOX 18.000 min ⁻¹ , 142 Nm, 35 kW	●	●	●	●
HSK A63	CELOX 15.000 min ⁻¹ , 217 Nm, 50 kW	●	●	●	●
HSK A63	CELOX 24.000 min ⁻¹ , 125 Nm, 30 kW	●	●		


CELOX 14000 1/min 22,00 kW

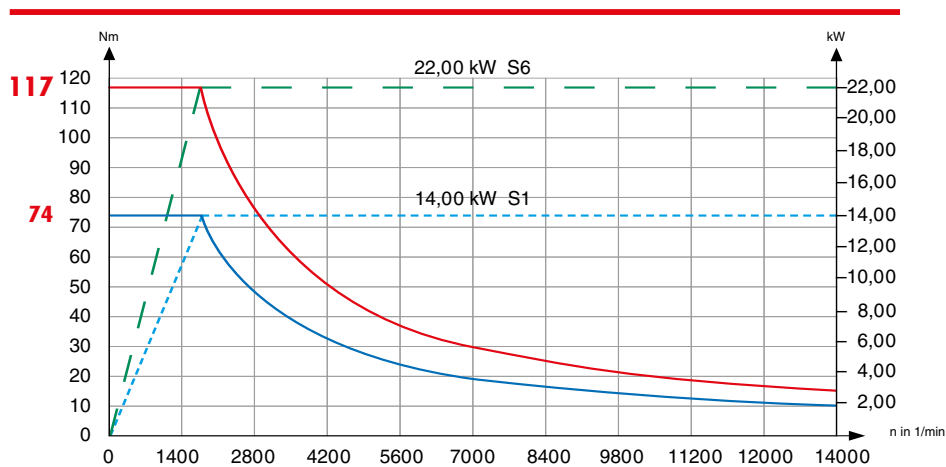

CELOX 14000 1/min 29,00 kW

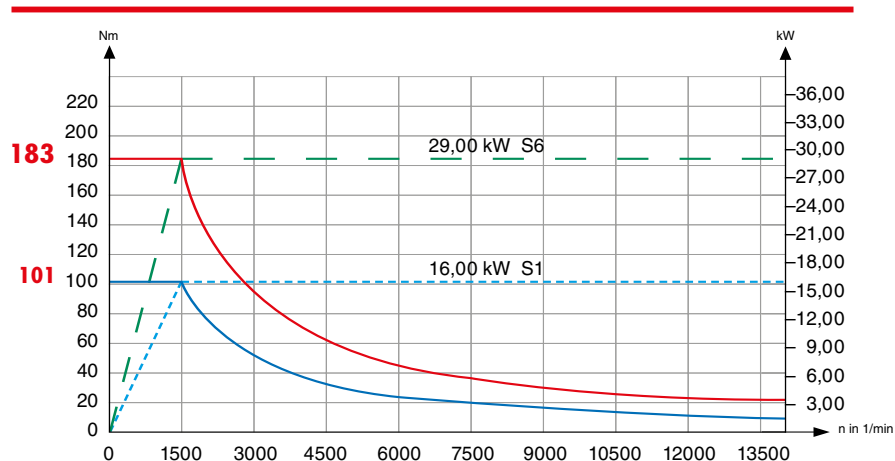


CELOX 14000 1/min 37,00 kW*

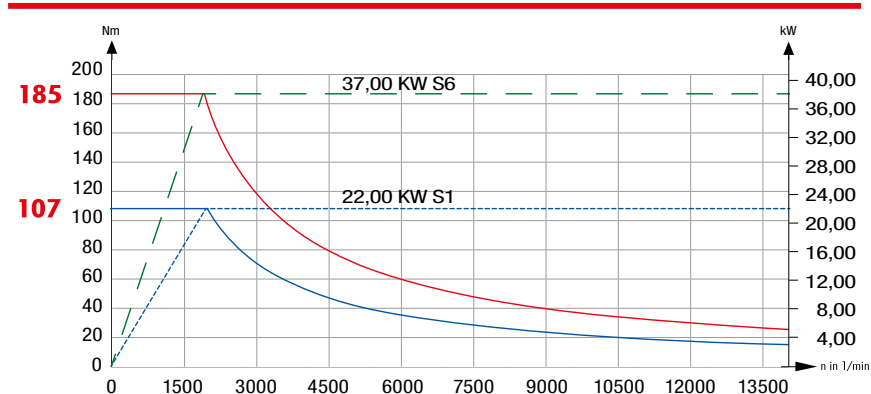


*Nicht für alle Bearbeitungszentren verfügbar.
Siehe technische Daten.
[Not available for all machining centres.
See technical data.]

CELOX 15000 1/min 50,00 kW*

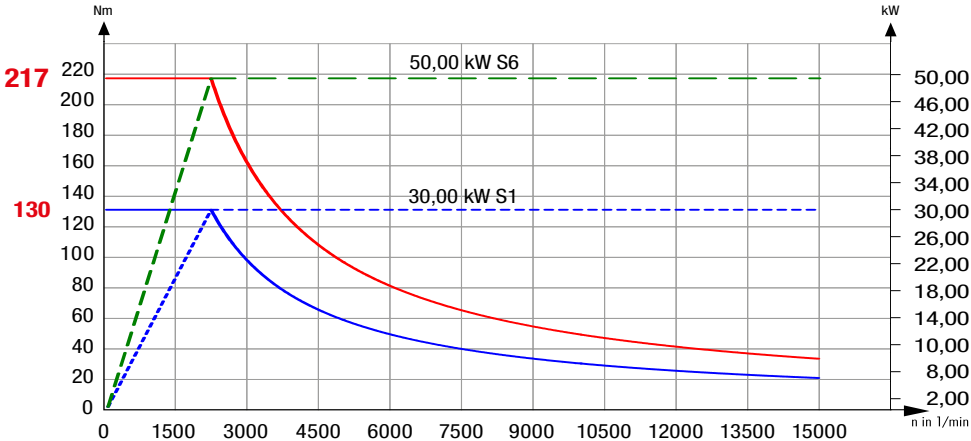

*Nicht für alle Bearbeitungszentren verfügbar.
 Siehe technische Daten.
 [Not available for all machining centres.
 See technical data.]

CELOX 18000 1/min 35,00 kW

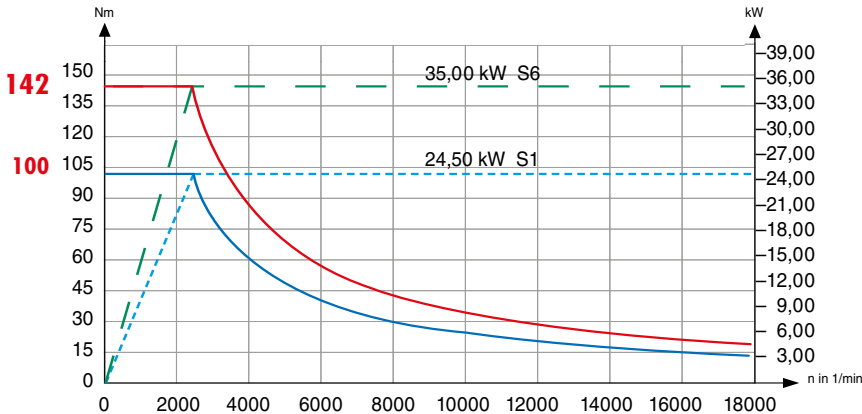

CELOX 24000 1/min 30,00 kW

